SMPRE
Precast Concrete Accessories
Strong in Manufacture of Precast Accessories

SMPRE™--Safety, Reliable and Enduring Structures!

E-MAIL: INFO@SIMENPRECAST.COM
WEBSITE: WWW.SIMENPRECAST.COM

Fixing Socket System

Fixing Sockets (SFS)

Ref.- No.	Type M	Length MM	Weight Kg/100Pcs	W.L.L KN
SFS06-040	6	40	1.00	1.5
SFS08-040	8	40	1.00	2.0
SFS08-050	8	50	1.40	2.5
SFS10-050	10	50	1.90	3.5
SFS12-060	12	60	3.80	5.0
SFS12-070	12	70	4.30	6.0
SFS16-070	16	70	9.40	7.0
SFS16-080	16	80	10.80	8.0
SFS16-100	16	100	12.40	10.0
SFS16-120	16	120	14.40	12.0
SFS20-100	20	100	17.00	12.5
SFS20-120	20	120	21.30	14.0
SFS24-120	24	120	28.00	18.0
SFS30-150	30	150	66.00	27.5

※Electro-galvansied and Hot-dip Galcanised is Available.
※Length Can Be Customized.
※Safety Factor:3.

Fixing Sockets with Cross Pin (SFC)

Ref.- No.	Type M	Length MM	Weight Kg/100Pcs	W.L.L KN
SFC12-060	12	60	7.50	5.0
SFC16-080	16	80	14.60	8.0
SFC16-100	16	100	16.50	10.0
SFC20-095	20	95	27.30	12.0
SFC20-115	20	115	30.80	13.0
SFC24-120	24	120	46.50	18.0
SFC30-150	30	150	81.70	27.5

※Electro-galvansied and Hot-dip Galcanised is Available.
※Length Can Be Customized.
※Safety Factor:3.

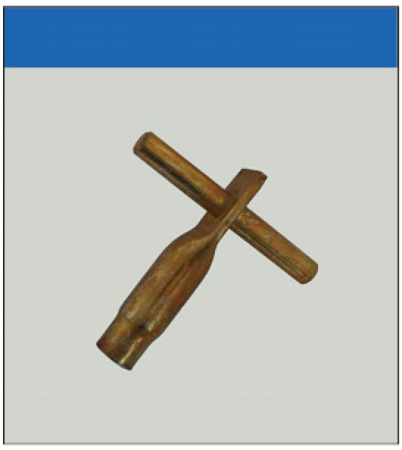

Fixing Sockets with Bent Tail (SFB)

Ref.- No.	Type M	Length MM	Weight Kg/100Pcs	W.L.L KN
SFB08-035	8	35	1.90	1.8
SFB10-060	10	60	4.60	4.0
SFB12-045	12	45	4.80	3.5
SFB12-070	12	70	7.40	6.0
SFB16-060	16	60	10.10	6.0
SFB16-100	16	100	14.80	10.0
SFB16-130	16	130	17.90	12.0
SFB20-100	20	100	24.10	12.5

※Electro-galvansied and Hot-dip Galcanised is Available.
※Length Can Be Customized.
※Safety Factor:3.

Fixing Sockets with Wavy Tail (SFW)

Ref.- No.	Type M	Length MM	Weight Kg/100Pcs	W.L.L KN
SFW10-040	10	40	1.70	3.0
SFW10-060	10	60	3.20	4.0
SFW12-050	12	50	3.80	4.0
SFW12-070	12	70	4.30	6.0
SFW16-070	16	70	8.10	7.0
SFW16-100	16	100	14.30	10.0
SFW20-100	20	100	17.50	12.5
SFW24-100	24	100	27.80	16.0

※Electro-galvansied and Hot-dip Galcanised is Available.
※Length Can Be Customized.
※Safety Factor:3.

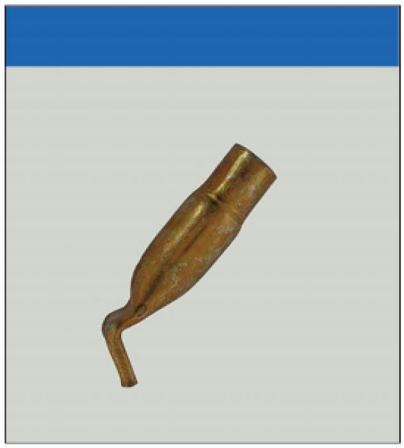

Dowel Fixing Sockets (SFD)

Ref.- No.	Type M	Length MM	Weight Kg/100Pcs	W.L.L KN
SFD12-060	12	60	3.80	5.0
SFD12-070	12	70	4.30	6.0
SFD16-070	16	70	9.40	7.0
SFD16-080	16	80	10.80	8.0
SFD16-100	16	100	12.40	10.0
SFD16-120	16	120	14.40	12.0
SFD20-100	20	100	17.00	12.5
SFD20-120	20	120	21.30	14.0
SFD24-120	24	120	28.00	18.0
SFD30-150	30	150	66.00	27.5

※Electro-galvansied and Hot-dip Galcanised is Available.
※Length Can Be Customized.
※Safety Factor:3.