SMPRE

Precast Concrete Accessories

Strong in Manufacture of Precast Accessories

SMPRE™--Safety, Reliable and Enduring Structures!

E-MAIL: INFO@SIMENPRECAST.COM

WEBSITE: WWW.SIMENPRECAST.COM

Spherical Head Transport Anchor(SLA)

Ref.- No.	Length	Weight	Packing	W.L.L
	MM	Kg/100Pcs	Pcs	T
SLA013-040	40	5.00	300	1.3
SLA013-050	50	5.10	300	1.3
SLA013-065	65	6.00	300	1.3
SLA013-085	85	7.00	200	1.3
SLA013-120	120	10.00	100	1.3
SLA013-240	240	17.00	100	1.3
SLA025-045	45	12.00	200	2.5
SLA025-055	55	13.00	150	2.5
SLA025-065	65	13.50	150	2.5
SLA025-085	85	16.00	100	2.5
SLA025-100	100	18.00	100	2.5
SLA025-120	120	20.00	100	2.5
SLA025-140	140	23.00	100	2.5
SLA025-170	170	26.00	100	2.5
SLA025-280	280	40.00	50	2.5
SLA040-075	75	28.00	50	4.0
SLA040-100	100	33.00	50	4.0
SLA040-120	120	37.00	50	4.0
SLA040-150	150	43.00	50	4.0
SLA040-170	170	46.00	50	4.0
SLA040-210	210	54.00	40	4.0
SLA040-240	240	61.00	25	4.0
SLA040-340	340	81.00	25	4.0
SLA040-420	420	110.00	20	4.0
SLA050-055	55	28.00	50	5.0
SLA050-065	65	31.00	50	5.0
SLA050-075	75	33.00	50	5.0
SLA050-085	85	34.00	50	5.0
SLA050-095	95	38.00	50	5.0
SLA050-110	110	42.00	50	5.0
SLA050-120	120	44.00	50	5.0
SLA050-140	140	50.00	40	5.0
SLA050-160	160	55.00	40	5.0
SLA050-180	180	59.00	40	5.0
SLA050-240	240	75.00	25	5.0
SLA050-340	340	99.00	20	5.0
SLA050-480	480	135.00	-	5.0
SLA075-085	85	62.00	25	7.5
SLA075-095	95	64.00	25	7.5
SLA075-100	100	67.00	25	7.5
SLA075-120	120	71.00	25	7.5
SLA075-140	140	78.00	25w	7.5
SLA075-165	165	89.00	25	7.5
SLA075-200	200	102.00	20	7.5
SLA075-300	300	136.00	15	7.5
SLA075-540	540	221.00	-	7.5
SLA075-680	680	273.00	-	7.5

Spherical Head Transport Anchor(SLA)

Ref.- No.	Length MM	Weight Kg/100Pcs	Packing Pcs	W.L.L T
SLA100-115	115	91.00	20	10.0
SLA100-120	120	93.00	20	10.0
SLA100-135	135	100.00	20	10.0
SLA100-150	150	107.00	20	10.0
SLA100-170	170	119.00	20	10.0
SLA100-200	200	135.00	15	10.0
SLA100-220	220	142.00	15	10.0
SLA100-250	250	155.00	15	10.0
SLA100-340	340	201.00	10	10.0
SLA100-680	680	365.00	-	10.0
SLA150-140	140	187.00	-	15.0
SLA150-165	165	201.00	-	15.0
SLA150-200	200	228.00	-	15.0
SLA150-300	300	299.00	-	15.0
SLA150-400	400	369.00	-	15.0
SLA150-840	840	700.00	-	15.0
SLA200-165	165	259.00	-	20.0
SLA200-200	200	280.00	-	20.0
SLA200-250	250	322.00	-	20.0
SLA200-340	340	402.00	-	20.0
SLA200-500	500	548.00	-	20.0
SLA200-1000	1000	1092.00	-	20.0
SLA320-200	200	586.00	-	32.0
SLA320-250	250	652.00	-	32.0
SLA320-280	280	708.00	-	32.0
SLA320-320	320	740.00	-	32.0
SLA320-700	700	1330.00	-	32.0
SLA320-1200	1200	2134.00	-	32.0

※Plain,Electro-galvansied and Hot-dip Galcanised is Available.
※CM490,20Mn2,Q345D and Stainless Steel is Available.
※Length Can Be Customized.
※Safety Factor:3.

Off-set Spherical Head Transport Anchor(SLAB)

Ref.- No.	Length MM	Weight Kg/100Pcs	Packing Pcs	W.L.L T
SLAB013-227	227	17.00	100	1.3
SLAB025-268	268	41.00	50	2.5
SLAB040-406	406	97.00	20	4.0
SLAB050-466	466	134.00	10	5.0
SLAB075-664	664	272.00	-	7.5
SLAB100-664	664	364.00	-	10.0
SLAB150-825	824	686.00	-	15.0
SLAB200-986	986	997.00	-	20.0

※Plain,Electro-galvansied and Hot-dip Galcanised is Available.
※CM490,20Mn2,Q345D and Stainless Steel is Available.
※Length Can Be Customized.
※Safety Factor:3.

Spherical Anchor System

Double Head Transport Anchor(SDA)

Ref.- No.	Length MM	Weight Kg/100Pcs	Packing Pcs	W.L.L T
SDA013-040	40	6.00	400	1.3
SDA013-050	50	6.80	400	1.3
SDA013-065	65	8.00	200	1.3
SDA013-085	85	9.00	200	1.3
SDA025-065	65	13.00	150	2.5
SDA025-085	85	16.00	100	2.5
SDA025-120	120	21.00	100	2.5
SDA050-110	110	46.00	50	5.0
SDA050-240	240	80.00	25	5.0

※Plain,Electro-galvansied and Hot-dip Galcanised is Available.
※CM490,20Mn2,Q345D and Stainless Steel is Available.
※Length Can Be Customized.
※Safety Factor:3.

Spherical Head Eye Anchor(SOA)

Ref.- No.	Length MM	Weight Kg/100Pcs	Packing Pcs	W.L.L T
SOA013-065	65	6.00	300	1.3
SOA025-090	90	16.00	100	2.5
SOA050-090	90	36.00	50	5.0
SOA050-120	120	43.00	50	5.0
SOA100-115	115	85.50	20	10.0
SOA100-180	180	117.00	-	10.0

※Plain,Electro-galvansied and Hot-dip Galcanised is Available.
※CM490,20Mn2,Q345D and Stainless Steel is Available.
※Length Can Be Customized.
※Safety Factor:3.

Spherical Head Anchor With Plate(SPA)

Ref.- No.	Length MM	Plate MM	Weight Kg/100 Pcs	W.L.L T
SPA025-055	55	70*70*6	32.10	2.5
SPA025-120	120	70*70*6	40.00	2.5
SPA050-055	55	90*90*8	71.30	5.0
SPA050-065	65	90*90*8	73.70	5.0
SPA050-110	110	90*90*8	84.80	5.0
SPA100-115	115	90*90*10	137.80	10.0

※Plain,Electro-galvansied and Hot-dip Galcanised is Available.
※CM490,20Mn2,Q345D and Stainless Steel is Available.
※Length Can Be Customized.
※Safety Factor:3.

Spherical Head Rod Anchor(SSRA)

Ref.- No.	Length MM	Weight Kg/100Pcs	Packing Pcs	W.L.L T
SSRA025-400	400	51.00	-	2.5
SSRA025-520	520	66.00	-	2.5
SSRA040-510	510	108.00	-	4.0
SSRA040-720	720	150.00	-	4.0
SSRA040-1150	1150	226.00	-	4.0
SSRA050-580	580	151.00	-	5.0
SSRA050-900	900	230.00	-	5.0
SSRA075-750	750	265.00	-	7.5
SSRA075-1150	1150	419.00	-	7.5
SSRA100-870	870	442.00	-	10.0
SSRA100-1300	1300	650.00	-	10.0
SSRA150-1080	1080	940.00	-	15.0
SSRA150-1550	1550	1280.00	-	15.0

※Plain,Electro-galvansied and Hot-dip Galcanised is Available.
※HRB400 and HRB500 is Available.
※Length Can Be Customized.
※Safety Factor:3.

Short Wavy Tail Spherical Head Anchor(SWS)

Ref.- No.	Length MM	Weight Kg/100Pcs	Packing Pcs	W.L.L T
SWS025-145	145	22	100	2.5
SWS025-190	190	27	80	2.5
SWS050-230	230	66	30	5.0
SWS075-270	270	128	15	7.5
SWS100-300	300	159	-	10.0
SWS100-325	325	174	-	10.0
SWS150-400	400	380	-	15.0
SWS200-500	500	540	-	20.0

※Plain,Electro-galvansied and Hot-dip Galcanised is Available.
※HRB400 and HRB500 is Available.
※Length Can Be Customized.
※Safety Factor:3.

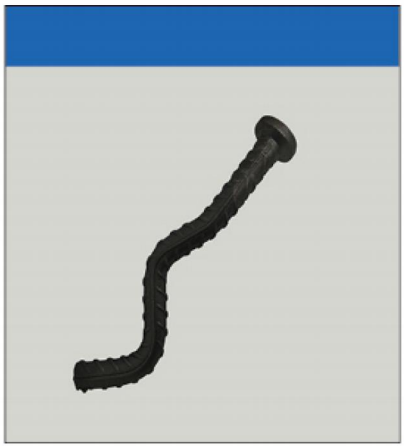

Short Wavy Tail Spherical Head Anchor(SWL)

Ref.- No.	Length MM	Weight Kg/100Pcs	Packing Pcs	W.L.L T
SWL025-350	350	47	50	2.5
SWL025-400	400	52	40	2.5
SWL050-450	450	124	-	5.0
SWL075-570	570	244	-	7.5
SWL100-620	620	323	-	10.0
SWL100-900	900	456	-	10.0
SWL150-1200	1200	1026	-	15.0
SWL200-1400	1400	1470	-	20.0

※Plain,Electro-galvansied and Hot-dip Galcanised is Available.
※HRB400 and HRB500 is Available.
※Length Can Be Customized.
※Safety Factor:3.

Spherical Anchor System

Lifting Clutch for Spherical Anchor(SLC)

Ref.- No.	Weight Kg	W.L.L T
SLC-013	0.98	1.3
SLC-025	1.98	2.5
SLC-050	3.80	5.0
SLC-100	9.80	10.0
SLC-200	25.00	20.0
SLC-320	45.00	32.0

※Electro-Galvansied.
※Safety Factor:5.

Rubber Recess Former for Spherical Anchor(SRR)

Ref.- No.	Weight Kg/100Pcs	System Code T
SRR-013	9.00	1.3
SRR-025	18.00	2.5
SRR-050	29.00	5.0
SRR-075	53.00	7.5
SRR-100	55.00	10.0
SRR-150	136.00	15.0
SRR-200	136.00	20.0
SRR-320	360.00	32.0

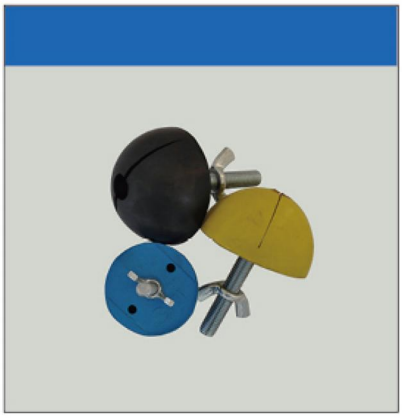

Rubber Recess Former with Magnetic (SRFM)

Ref.- No.	SYSTEM CODE	Weight Kg/Pcs
SRFM-013	1.3	0.14
SRFM-025	2.5	0.22
SRFM-050	5.0	0.41
SRFM-075	7.5	0.65

Rubber Grommet (SRG)

Ref.- No.	SYSTEM CODE	Weight Kg/100Pcs
SRG-013	1.3	0.4
SRG-025	2.5	0.9
SRG-050	5.0	1.4
SRG-075	7.5	2.2