SMPRE

Precast Concrete Accessories

Strong in Manufacture of Precast Accessories

SMPRE™--Safety, Reliable and Enduring Structures!

E-MAIL: INFO@SIMENPRECAST.COM

WEBSITE: WWW.SIMENPRECAST.COM

Spread Anchor System

Two Hole Anchor(SHA)

Ref.- No.	Length MM	Weight Kg/Pcs	Packing Pcs	W.L.L T
SHA014-090	90	0.09	200	1.4
SHA025-090	90	0.17	100	2.5
SHA030-120	120	0.30	50	3.0
SHA040-120	120	0.37	50	4.0
SHA050-120	120	0.45	50	5.0
SHA075-160	160	0.96	20	7.5
SHA100-165	165	1.19	-	10.0
SHA140-240	240	2.56	-	14.0
SHA220-300	300	4.08	-	22.0

※Plain,Electro-galvansied and Hot-dip Galcanised is Available.
※Q345B,Q345D and Stainless Steel is Available.
※Length Can Be Customized.
※Safety Factor:3.

Spread Anchor(SSA)

Ref.- No.	Length MM	Weight Kg/Pcs	Packing Pcs	W.L.L T
SSA014-110	110	0.14	100	1.4
SSA025-150	150	0.30	50	2.5
SSA025-200	200	0.44	50	2.5
SSA025-250	250	0.55	50	2.5
SSA030-160	160	0.45	50	3.0
SSA030-200	200	0.58	-	3.0
SSA030-280	280	0.84	-	3.0
SSA040-180	180	0.62	-	4.0
SSA040-240	240	0.84	-	4.0
SSA050-180	180	0.78	-	5.0
SSA050-240	240	1.05	-	5.0
SSA075-260	260	1.80	-	7.5
SSA075-300	300	2.11	-	7.5
SSA100-300	300	2.64	-	10.0
SSA100-370	370	2.64	-	10.0
SSA140-370	370	3.26	-	14.0
SSA140-460	460	3.95	-	14.0
SSA220-500	500	7.59	-	22.0

※Plain,Electro-galvansied and Hot-dip Galcanised is Available.
※Q345B,Q345D and Stainless Steel is Available.
※Length Can Be Customized.
※Safety Factor:3.

Erection Anchor(SEA)

Ref.- No.	Length MM	Weight Kg/Pcs	Packing Pcs	W.L.L T
SEA014-200	200	0.37	-	1.4
SEA025-230	230	0.69	-	2.5
SEA040-270	270	1.30	-	4.0
SEA050-290	290	1.66	-	5.0
SEA075-320	320	2.42	-	7.5
SEA100-390	390	3.95	-	10.0
SEA125-500	500	6.64	-	12.5
SEA170-500	500	8.18	-	17.0
SEA220-500	500	9.84	-	22.0

※Plain,Electro-galvansied and Hot-dip Galcanised is Available.
※Q345B,Q345D and Stainless Steel is Available.
※Length Can Be Customized.
※Safety Factor:3.

Edge Erection Anchor(SEE)

Ref.- No.	Length MM	Weight Kg/Pcs	Packing Pcs	W.L.L T
SEE025-100	100	0.43	50	2.5
SEE050-114	114	0.85	20	5.0
SEE100-160	160	1.75	-	10.0

※Plain,Electro-galvansied and Hot-dip Galcanised is Available.
※Q345B,Q345D,45# and Stainless Steel is Available.
※Safety Factor:3.
※Can Improve the Safety W.L.L Through Heat Treatment.

Fleet Lift Forged Erection Anchor(SFA)

Ref.- No.	Length MM	Weight Kg/Pcs	Packing Pcs	W.L.L T
SFA025-089	89	0.22	100	2.5
SFA025-100	100	0.24	100	2.5
SFA050-100	100	0.47	50	5.0
SFA050-105	105	0.49	50	5.0
SFA050-125	125	0.59	25	5.0
SFA050-130	130	0.63	25	5.0
SFA050-150	150	0.71	25	5.0
SFA100-178	178	1.67	10	10.0

※Plain,Electro-galvansied and Hot-dip Galcanised is Available.
※Q345B,Q345D,45# and Stainless Steel is Available.
※Safety Factor:3.

Spread Anchor System

Ring Lifting Clutch(SRLC)

Ref.- No.	Weight Kg/Pcs	W.L.L T
SRLC-025	1.81	2.5
SRLC-050	3.54	5.0
SRLC-100	8.02	10.0
SRLC-260	30.62	26.0

※Electro-Galvansied.
※Safety Factor:5.

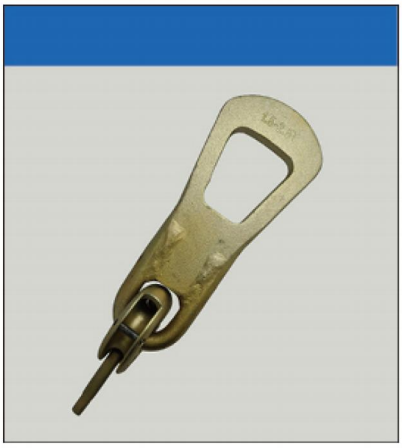

Wire Rope Ring Lifting Clutch(SWLC)

Ref.- No.	Weight Kg/Pcs	W.L.L T
SWLC-013	0.42	1.3
SWLC-025	1.50	2.5
SWLC-050	3.50	5.0
SWLC-100	10.00	10.0

※Electro-Galvansied.
※Safety Factor:4.

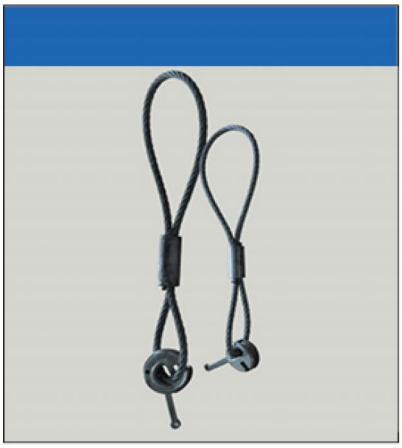

Rubber Recess Former for Spread Anchor(SSF)

Ref.- No.	SYSTEM CODE	Weight Kg/Pcs
SSF-12.5	1.25	0.05
SSF-025	2.5	0.08
SSF-050	5.0	0.21
SSF-100	10.0	0.59
SSF-260	26.0	1.66